


# MMP-15 and MMP-30 EOD Robot System

## Specifications and features

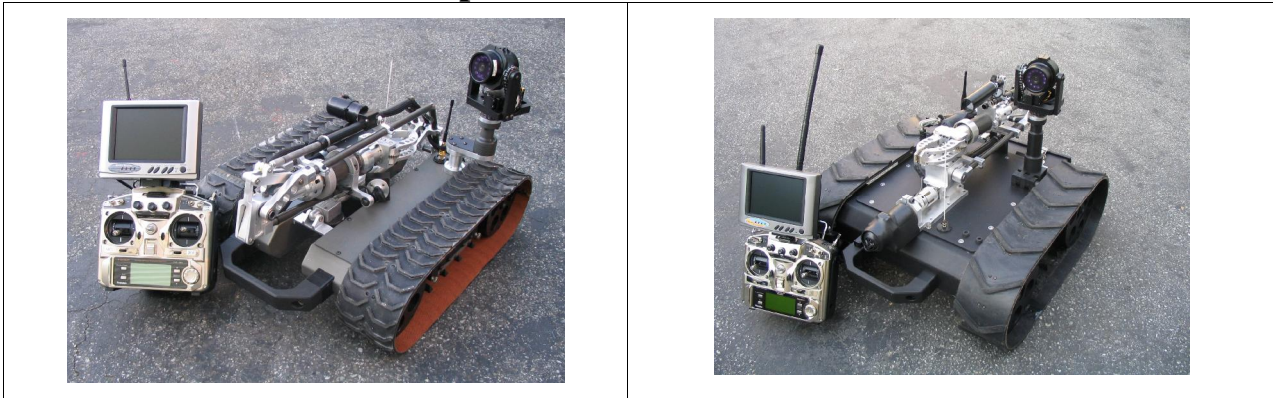

MMP-15 EOD	MMP-30 EOD
<p><b>Specs:</b></p> <ul style="list-style-type: none"> <li>- Weight: 36 pounds with OCU</li> <li>- Size Collapsed: 21" x 17"W x 11"H <ul style="list-style-type: none"> <li>- Back Packable</li> </ul> </li> <li>- Track Drive, 2.4 ft./sec</li> <li>- Operation time constant driving 45min-1 hour</li> <li>- Operation time stop and go, 2 hours</li> <li>- LED fuel gage on robot</li> <li>- Additional payload capacity – 8 pounds</li> <li>- Video: <ul style="list-style-type: none"> <li>- Pan/Tilt Color IR cam <ul style="list-style-type: none"> <li>-180 deg. Pan</li> <li>-150 deg. Tilt</li> </ul> </li> <li>- Color wide angle gripper camera</li> <li>- Color wide angle rear facing camera</li> <li>- 2.4 or 1.5 GHz analog 8 channels to operate on.</li> </ul> </li> <li>- One more available camera input <ul style="list-style-type: none"> <li>- OCU, 8 channel</li> <li>- 72/75 MHz digital (working on a 2.4 GHz spread spectrum version)</li> <li>- 5 pounds</li> <li>- 6" color LCD with audio from robot</li> </ul> </li> <li>- 4 axis arm <ul style="list-style-type: none"> <li>- Shoulder, Elbow, Wrist, Gripper</li> <li>- 5 pound lift at full extension</li> <li>- 15 Pound lift retracted positions</li> <li>- 15 inch reach</li> <li>- Continuous wrist rotation</li> </ul> </li> </ul>	<p><b>Specs:</b></p> <ul style="list-style-type: none"> <li>- Weight: 50 pounds with OCU</li> <li>- Size Collapsed: 23.5" x 20"W x 12"H <ul style="list-style-type: none"> <li>- Back Packable</li> </ul> </li> <li>- Track Drive, 3.2 ft./sec</li> <li>- Operation time constant driving 45min-1 hour</li> <li>- Operation time stop and go, 2 hours</li> <li>- LED fuel gage on robot</li> <li>- Additional payload capacity – 10 pounds</li> <li>- Video: <ul style="list-style-type: none"> <li>- Pan/Tilt Color IR cam <ul style="list-style-type: none"> <li>-180 deg. Pan</li> <li>-150 deg. Tilt</li> </ul> </li> <li>- Color wide angle gripper camera</li> <li>- Color wide angle rear facing camera</li> <li>- 2.4 or 1.5 GHz analog 8 channels to operate on.</li> </ul> </li> <li>- One more available camera input <ul style="list-style-type: none"> <li>- OCU, 8 channel</li> <li>- 72/75 MHz digital (working on a 2.4 GHz spread spectrum version)</li> <li>- 5 pounds</li> <li>- 6" color LCD with audio from robot</li> </ul> </li> <li>- 4 axis arm <ul style="list-style-type: none"> <li>- Shoulder, Elbow, Wrist, Gripper</li> <li>- 5 pound lift at full extension</li> <li>- 15 Pound lift retracted positions</li> <li>- 20 inch reach</li> <li>- Continuous wrist rotation</li> </ul> </li> </ul>